

INDUSTRIAL VERSAFLEX HE SERIES

HIGH EFFICIENCY MELTBLOWN CARTRIDGES



Industrial[®] Versaflex High Efficiency Meltblown Cartridges assure maximum process compatibility due to their thermally-bonded, glue-free design. Their graded density matrix traps and holds dirt within, providing longer life and better flow rates than standard cartridges.

These filter cartridges are 100% polypropylene and manufactured with FDA-listed materials using a thermal-bonding process that seals the meltblown media to the endcaps to assure a bypass-free cartridge.

Versaflex High Efficiency Meltblown Cartridges have been performance tested to assure you of a quality product. They deliver high dirt-loading capabilities, with superior performance over spun-bonded and stringwound cartridges.

FEATURES/BENEFITS

- Absolute rated 99% efficiency at stated micron size
- Chemically compatible in most applications
- High dirt-loading capacity
- Longer life than spun-bonded and stringwound cartridges
- Low pressure drop
- 100% polypropylene cartridge
- Rigid, polypropylene center core
- Variety of O-rings available

- No surfactants, binders or adhesives used in production
- Manufactured with FDA-listed materials
- Meets USP Class IV biological test for plastics
- Several lengths and endcap configurations
- Eight micron ratings
- Micron rating stamped onto cartridge for easy identification
- Safe, easy incineration and disposal

APPLICATIONS

- Finish machining
- Food and beverage
- Oils
- Parts washers
- Pre-filter for RO systems

- Seal protection
- Solvents
- Spray nozzle protection

Custom configurations available. Please contact customer service.



CARTRIDGE SPECIFICATIONS

Filter Media	Polypropylene
Max. Temp. Rating	160°F (71.1°C)
Max. Differential Pressure	30 PSIG (2.1 bar) dirty
Recommended Change Out	10-15 PSIG (0.7-1.0 bar)

CASE QUANTITY

10": 30 per case
 20-40": 15 per case
 All with endcaps: 15 per case

PRESSURE DROP VS FLOW RATE

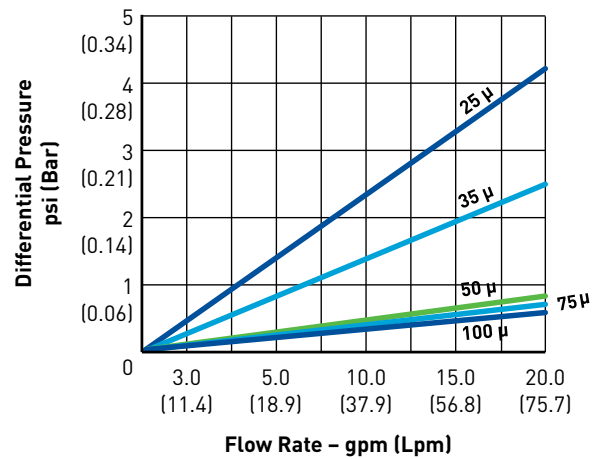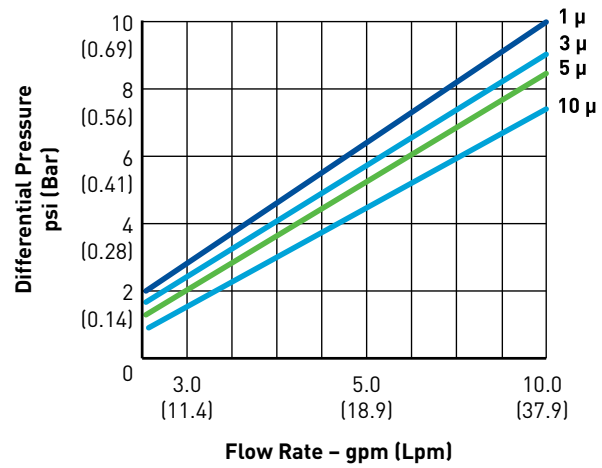

ORDERING INFORMATION

To create your ordering part number, use the part number configurator below.


Custom configurations available. Please contact customer service.

EXAMPLE: VFHE50-20BHPXXDP

Versaflex Filter Cartridge (VFHE)

50-absolute micron rating (50), 20" length (20), 2.5" diameter (B), High efficiency cartridge (H)

Polypropylene core (P), No endcaps (X), No outer sleeve (X), Double-open-ended (D), DOE Polyfoam flat gasket (P)

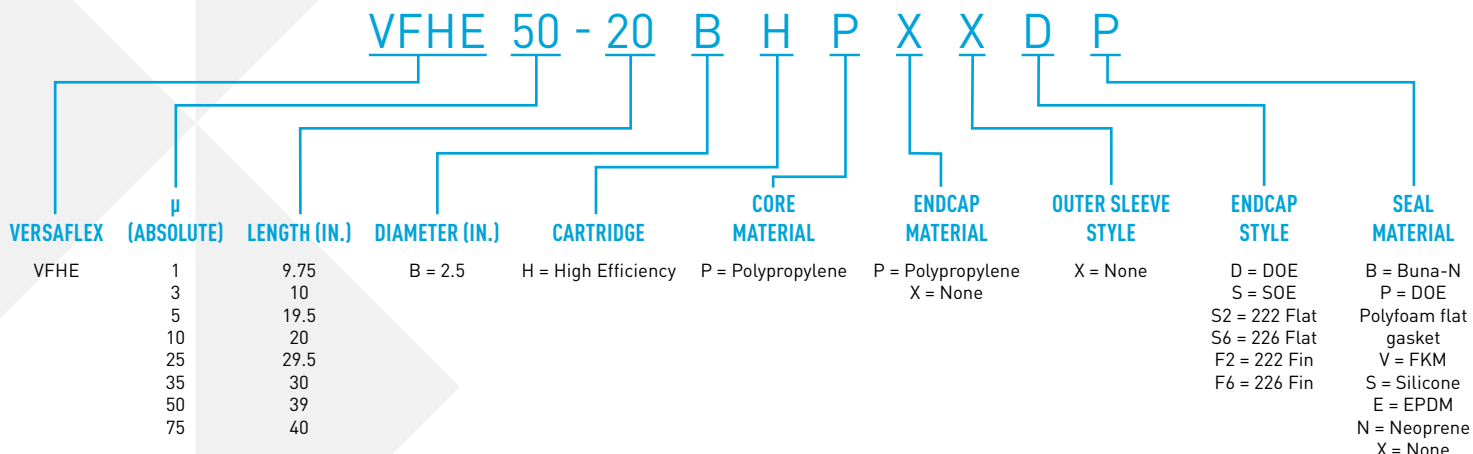



WATER QUALITY SYSTEMS

5730 NORTH GLEN PARK ROAD, MILWAUKEE, WI 53209

P: 262.238.4400 | F: 262.238.4404

PENTAIRINDUSTRIAL.COM

CUSTOMER CARE: 800.279.9404 | tech-support@pentair.com

© 2015 Pentair Residential Filtration, LLC. All rights reserved.

§For a detailed list of where Pentair trademarks are registered, please visit waterpurification.pentair.com. Pentair trademarks and logos are owned by Pentair LLC or its affiliates. Third party registered and unregistered trademarks and logos are the property of their respective owners.
4003011 Rev E NV15